

Specifications SR175

Performance Specs

Rated Operating Capacity 50%	790 kg
ROC with counterweights 50%	835 kg
Tipping Load	1588 kg
Lift Cylinder Breakout Force	21.3 kN
Bucket Cylinder Breakout Force	31.8 kN
Boom Geometry	Radial

Engine

Displacement	2.2 l
Horsepower	60 hp @ 2900 rpm
Peak torque	171 Nm @ 1800 rpm
Aspiration type	Turbo

Travel Speed

Low Range	11.9 km/h
High Range (Optional)	18.5 km/h

Hydraulic System

Pump flow	72 LPM
Optional high flow	108 LPM
Relief Pressure	207 bar

Weights

Operating Weight	2812 kg
Shipping Weight	2675 kg

Service Capacity

Fuel Tank	75.5 l
-----------	--------

Specifications SV185

Performance Specs

Rated Operating Capacity 50%	840 kg
ROC with counterweights 50%	885 kg
Tipping Load	1678 kg
Lift Cylinder Breakout Force	12.2 kN
Bucket Cylinder Breakout Force	24.2 kN
Boom Geometry	Vertical

Engine

Displacement	2.2 l
Horsepower	60 hp @ 2.900 rpm
Peak torque	171 Nm @ 1.800 rpm
Aspiration type	Turbo

Travel Speed

Low Range	11.9 km/h
High Range (Optional)	18.5 km/h

Hydraulic System

Pump flow	72 LPM
Optional high flow	108 LPM
Relief Pressure	207 bar

Weights

Operating Weight	2950 kg
Shipping Weight	2810 kg

Service Capacity

Fuel Tank	75.5 l
-----------	--------



- **EXCELLENT RESPONSE TO LOADS WITH TURBO ENGINES**
- **BEST-IN-CLASS STABILITY:** long wheelbase and optimised weight distribution
- **EXCELLENT DUMP HEIGHT AND DUMP ANGLE:** fast and efficient material dump
- **SUPERIOR CAB ROOMINESS AND COMFORT:** flat flat floor, easy cab access, ergonomic joysticks
- **EXCELLENT 360° VISIBILITY:** large windows, good visibility on bucket cutting edge, convenient rear visibility

Specifications SR200

Performance Specs

Rated Operating Capacity 50%	905 kg
ROC with counterweights 50%	950 kg
Tipping Load	1814 kg
Lift Cylinder Breakout Force	27.3 kN
Bucket Cylinder Breakout Force	31.8 kN
Boom Geometry	Radial

Engine

Displacement	3.2 l
Horsepower	74 hp @ 2.500 rpm
Peak torque	275 Nm @ 1.400 rpm
Aspiration type	Turbo

Travel Speed

Low Range	11.6 km/h
High Range (Optional)	19.2 km/h

Hydraulic System

Pump flow	85 LPM
Optional high flow	116 LPM
Relief Pressure	207 bar

Weights

Operating Weight	3130 kg
Shipping Weight	2995 kg


Service Capacity

Fuel Tank	75.5 l
-----------	--------

SKID STEER LOADERS

SR175 | SV185 | SR200

General dimensions

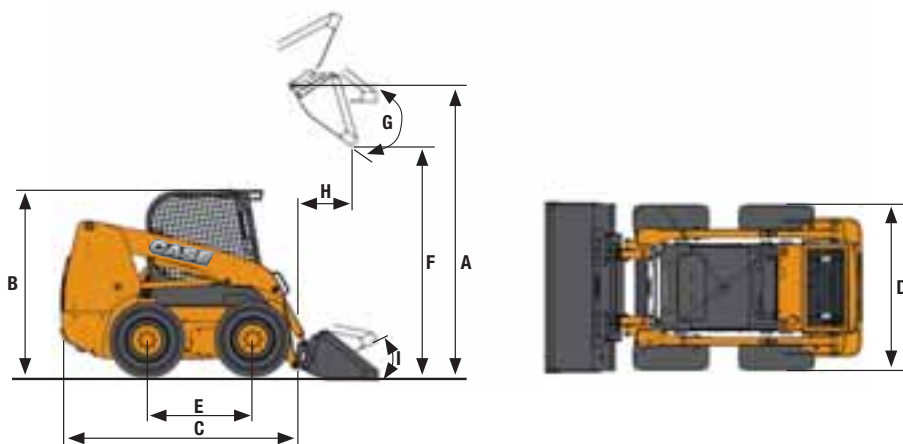

	SR175	SV185	SR200
A Height to Bucket Hinge Pin	3.099 mm	3.048 mm	3.124 mm
B Height to Top of ROPS	1.974 mm	1.974 mm	1.998 mm
C Length without attachment	2.685 mm	2.710 mm	2.669 mm
D Overall Width	1.678 mm	1.678 mm	1.755 mm
E Wheelbase	1.128 mm	1.128 mm	1.128 mm
F Dump height *	2.470 mm	2.377 mm	2.495 mm
G Dump Angle	40°	52°	40°
H Dump Reach @ Max Height	542 mm	783 mm	517 mm
I Rollback Angle (Bucket on Ground)	32°	35°	31°

* With D&F Bucket

Many attachments mean many business opportunities



BUCKETS

tailor made bucket for a wide range of applications



PLANERS

wide offering of asphalt planers



BROOM BUCKES

efficient surfaces sweeping



HAMMERS

for concrete demolition, trenching and general excavation work



AUGERS

for easy boring of holes in the ground

Check complete list of available attachmente on the Parts & Service attachmente catalogue



Conforms to directive 2006/42/EC

